



Installation Instructions for KPMI Part No: 20-20132

Harley Davidson 88" Twin Cam

Lightweight Racing Valve Spring Kit

A) 20-20132 Custom Kit Includes

<u>KPMI Part No.</u>	<u>Qty</u>	<u>Application</u>	<u>Description</u>
20-20124	4 - Pcs	Intake / Exhaust	H.T. Steel Retainers
20-20126	4 - Prs	Intake / Exhaust	H.T. Keepers
20-20127	4 - Prs	Intake / Exhaust	Chrome Silicon Springs
20-20128	4 - Pcs	Intake / Exhaust	H.T. Basewashers

B) Recommended Installed Height - Intake/Exhaust

1. Installed Height (Outer Spring)	1.800" - 1.810"
2. Seat Pressure	175 #
3. Max Valve Lift	0.600"

C) Notes

1. The difference between the installed height and the coil bind height is considered "Free-Travel"

The coil bind height is determined by compressing the spring or springs with the retainer and basewasher in place, a vice can be used for this operation, once springs are compressed measure the distance between the retainer and basewasher where the outer spring contacts them.

2. Free-travel should always be gross valve lift +.060" for safe operation.
3. Retainer to seal and retainer to guide clearance should also be gross valve lift +.060" for safe operation.
4. Failure to check valve train clearances can result in serious damage to an engine

TECH TIPS

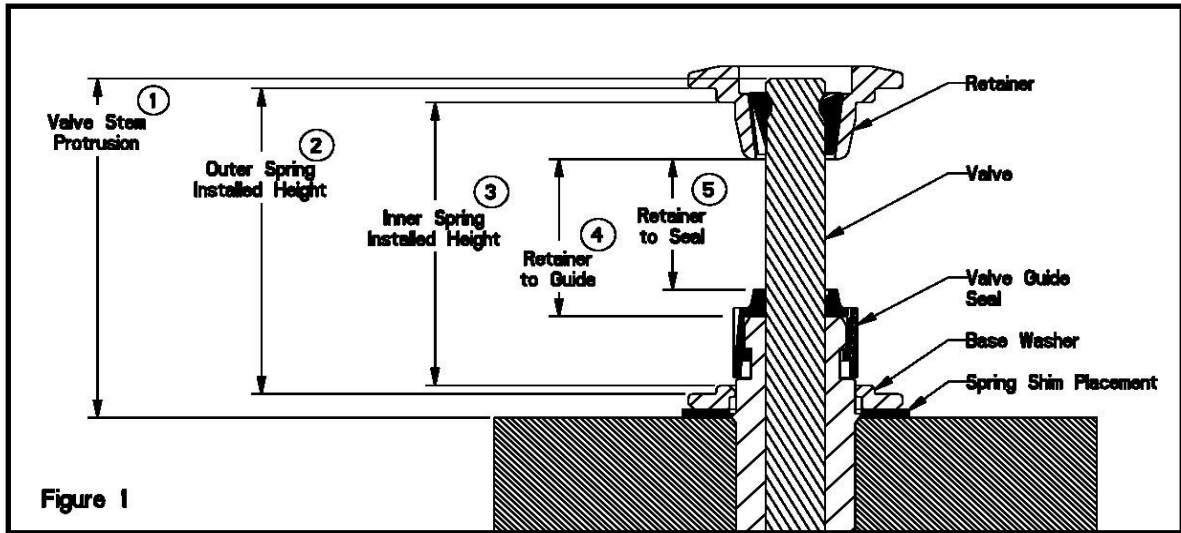


Figure 1

1. Stem Protrusion is measured from the tip of the valve stem to the cylinder head. See Figure 1.
2. Outer spring installed height is measured where the outer spring contacts the retainer and lower component when assembled. See Figure 1.
3. Inner spring installed height is measured where the inner spring contacts the retainer and lower component when assembled. See Figure 1.
4. Retainer to guide clearance is the distance between the valve guide (w/o the seal) and the bottom of the retainer, with the valve in the closed position. See Figure 1 and Notes 3 & 4.
5. Retainer to seal clearance is the distance between the valve stem seal and the bottom of the retainer, with the valve in the closed position. See Figure 1 and Notes 3 & 4.

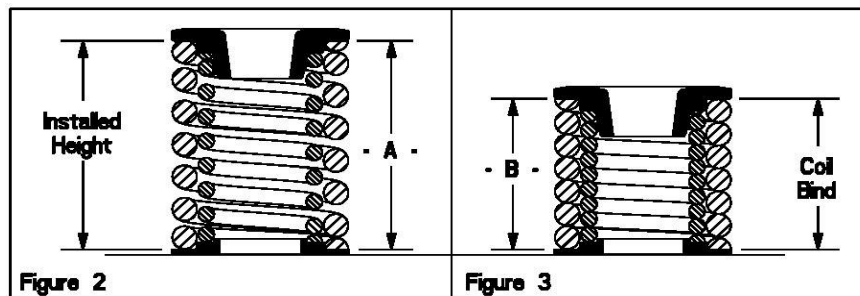


Figure 2

Figure 3

1. In Figure 2 the installed height is measured from where the outer spring contacts the retainer and the basewasher. This measurement is taken when the valve, basewasher, retainer, and keepers are assembled in the cylinder head.

1. In Figure 3 the coil bind height is determined by compressing the spring or springs with the retainer and basewasher in place, a vice can be used for this operation, once springs are compressed measure the distance between the retainer and basewasher where the outer spring contacts them.

1. The difference between the installed height and the coil bind height is considered "Free-Travel"
2. Free-travel should always be gross valve lift +.060" for safe operation.
3. Retainer to seal and retainer to guide clearance should also be gross valve lift +.060" for safe operation.
4. Failure to check valve train clearances can result in serious damage to an engine.